




Ceramic Seal



Butterfly Seal





Polygon Joint




Coolant Management




Tech Details

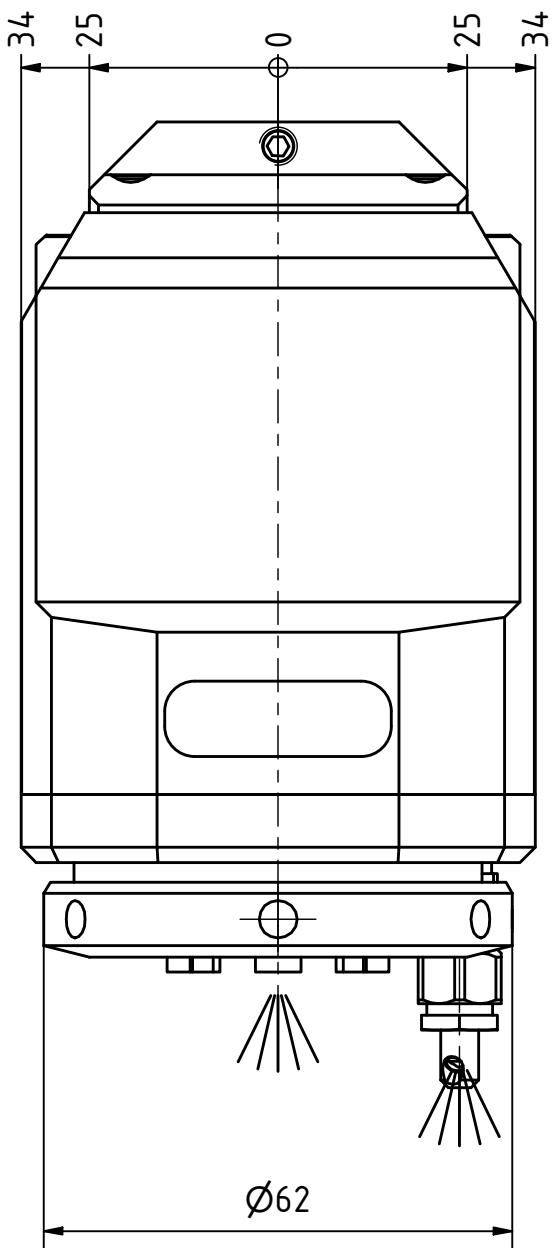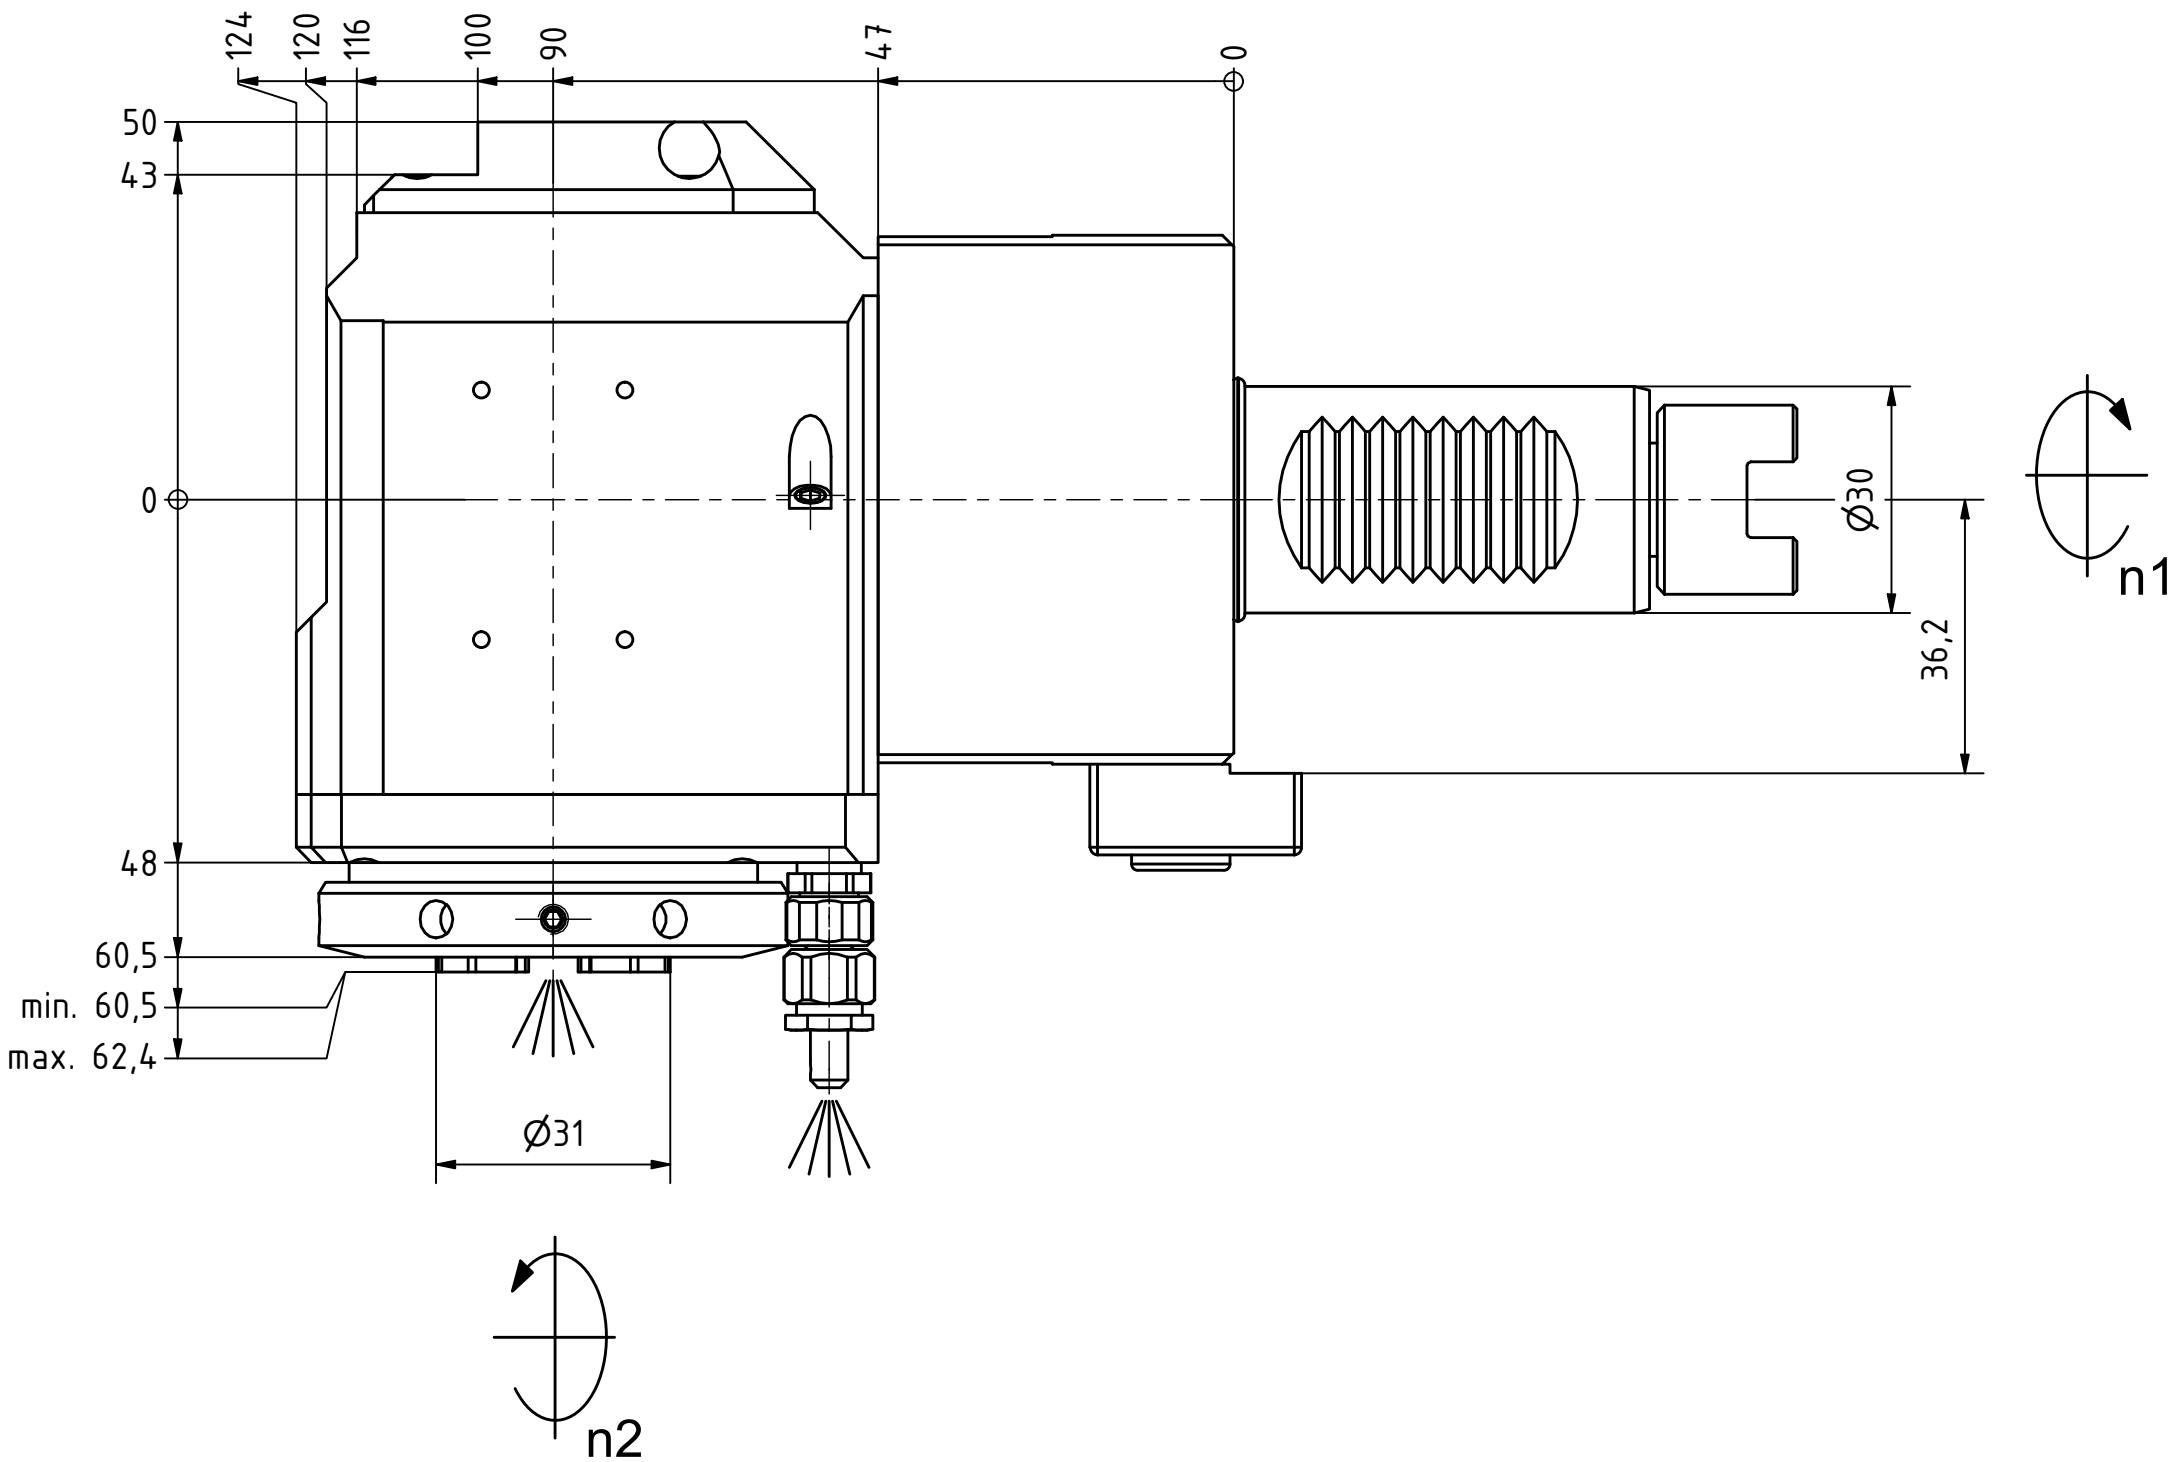



Spannzange / collet ER25 DIN6499
Spannbereich / clamping range: 1,0 - 16,0

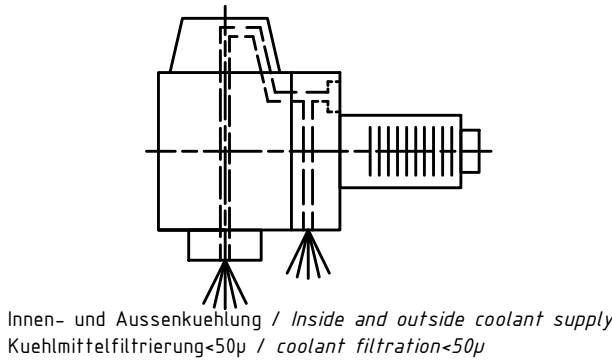


Innen- und Aussenkuehlung / Inside and outside coolant supply
Kuehlmittelfiltrierung<50µ / coolant filtration<50µ

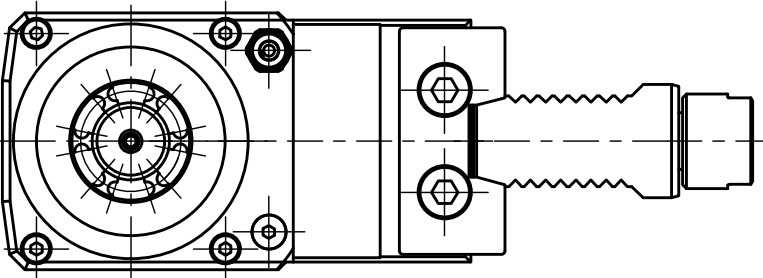

Doppelverzahnung Lizenz Traub
double tooth system licence Traub

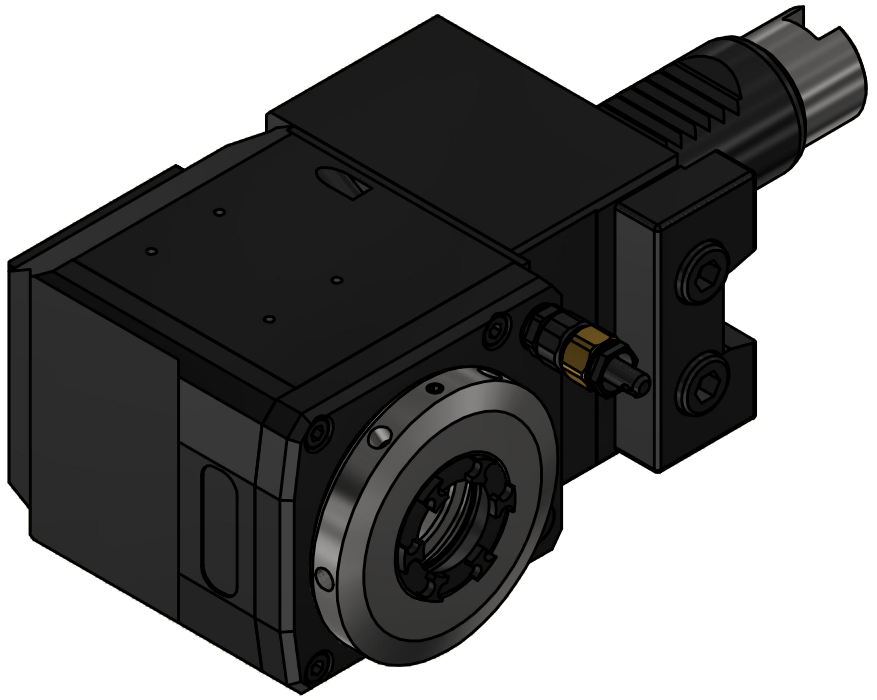

Spannzangenschlüssel für
innenliegende Mutter
Clamping wrench for
internal collet
225AX



Hakenschlüssel
mit Zapfen
Hook wrench
with fixed pin
DIN1810 B 58x62

Copyright **EWS Tool Technologies**
Weitergabe und Vervielfaeltigung dieser Unterlage,
Verwertung und Mitteilung ihres Inhalts nicht
gestattet, soweit nicht ausdrecklich zugestanden.
Zuwoerhandlungen verpflichten zu Schadenersatz.

Bemerkung - Note	
Für Trockenlauf geeignet! Use without coolant fluid allowed!	
mit Kegelrollenlager with taper roller bearing(s)	

Technische Daten - technical data	
Weight	= 4.724 [kg]
Torque max. (M1/M2)	= 20 / 40 [Nm]
Speed max. (n1/n2)	= 8000 / 4000 [1/min]
Gear ratio (i)=n1:n2	= 2:1
Pressure (pmax)	= 70 [bar]

Benennung - Title	
Radial Bohr und Fräskopf	
Radial drilling and milling head	

EWS Tool Technologies	
EWS Werkzeug GmbH & Co. KG Maybachstr. 1 D-73066 Uhingen www.ews-tools.de	
Technische Änderungen vorbehalten! Subject to technical modifications!	
IDENT: DEWS274484	
REV: -/A	
MNR.	
60.3025KRG300RLIKD12VIM	
234326	

