


Hydrodehnfutter / hydraulic chuck NBC-20/25-46

Hülsen / collets 28.20xxHYDSP

XX (Ø) 3 4 5 6 7 8 9 10 12 14 16  
1/8 3/16 1/4 5/16 3/8 7/16 1/2 9/16 5/8

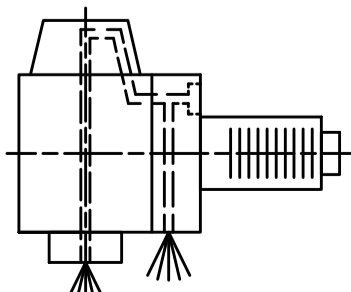

Innen- und Aussenkühlung / inside and outside coolant supply  
Kühlmittelfiltration-50µ / coolant filtration-50µ

Bemerkung - Note  
Für Trockenlauf geeignet!  
Use without coolant fluid allowed!

Technische Daten - technical data  
Weight = 7.937 [kg]  
Torque max. (M1/M2) = 70 / 70 [Nm]  
Speed max. (n1/n2) = 6000 / 6000 [1/min]  
Gear ratio (i)=n1:n2 = 1:1  
Pressure (pmax) = 70 [bar]

Bemerkung - Note  
Radial Bohr und Fräskopf, zurückges  
Radial drill. and mill. head offset

EWS Werkzeug GmbH & Co. KG  
Hauptstr. 1  
42706 Solingen  
www.ews-tool.de  
Technische Änderungen vorbehalten!  
Subject to technical modifications!  
IDENT: DEWS235442  
REV: -/D  
NR. - AN.  
HNR.  
80.5520HYDVL4IKDY52  
201190

QR